


Standard Connectors

PC4A0002 - Square Flange Feedthru Receptacle



To Fit H Interface Adaptors

Interconnect Solutions Worldwide

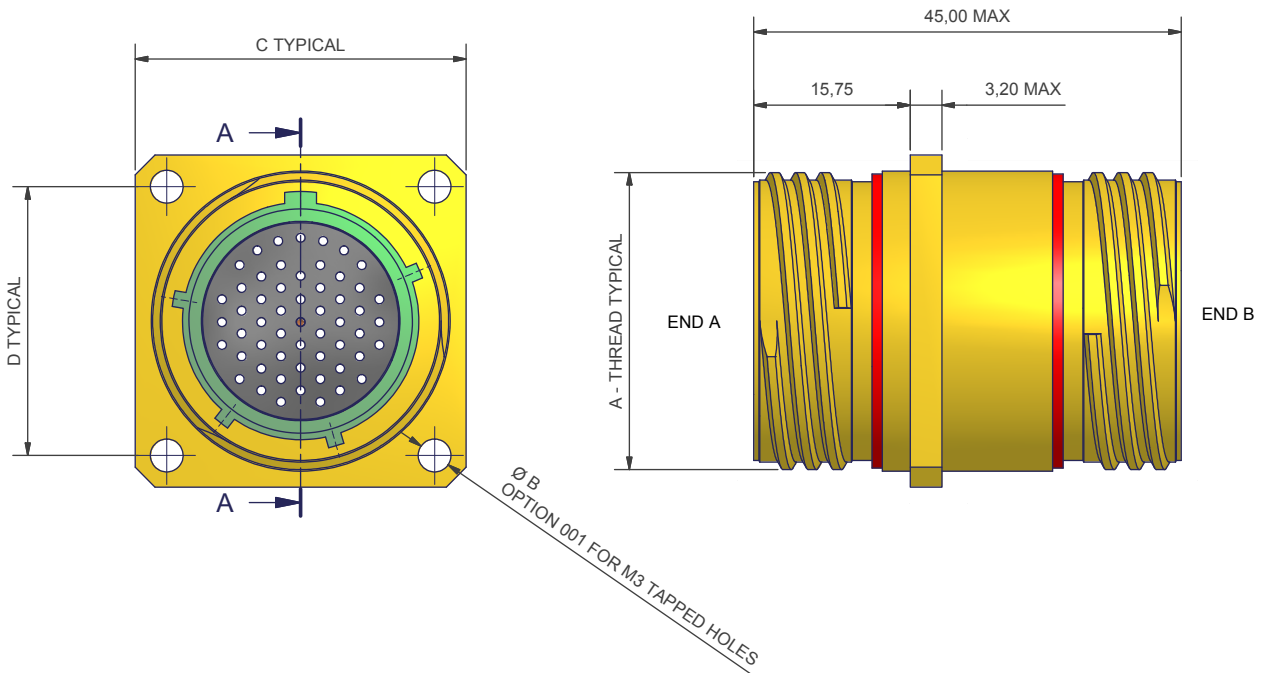

SHELL SIZE	A THREAD	B DIA +/-0.3	C +/-0.25	D +/-0.15
09	0.625-0.1P-0.3L-TS	3.3	23.8	18.3
11	0.750-0.1P-0.3L-TS	3.3	26.2	20.6
13	0.875-0.1P-0.3L-TS	3.3	28.6	23.0
15	1.000-0.1P-0.3L-TS	3.3	31.0	24.6
17	1.188-0.1P-0.3L-TS	3.3	33.3	27.0
19	1.250-0.1P-0.3L-TS	3.3	36.5	29.4
21	1.375-0.1P-0.3L-TS	3.3	39.7	31.8
23	1.500-0.1P-0.3L-TS	4.0	42.9	34.9
25	1.625-0.1P-0.3L-TS	4.0	46.0	38.1

CODE	MATERIAL / PLATING OPTIONS
1-C	ALUMINIUM / ELECTROLESS NICKEL
1-B	ALUMINIUM / CADMIUM OLIVE DRAB OVER ELECTROLESS NICKEL
1-ZB	ALUMINIUM / ZINC COBALT OLIVE DRAB OVER ELECTROLESS NICKEL
4-J	STAINLESS STEEL / PASSIVATE
2-Z	NICKEL ALUMINIUM BRONZE / SHOT BLAST

NOTES

GENERALLY TO THE REQUIREMENTS OF MIL-DTL-38999 SUPPLIED WITH CRIMP CONTACTS AND INSERTION TOOL
SEAL - SILICONE ELASTOMER
INSULATOR - THERMOPLASTIC
POTTING - RTV3140

PC4A0002-1135PSN-1-C-001

BASIC No _____
SHELL SIZE _____
INSERT ARRANGEMENT _____
CONTACT END A _____
CONTACT END B _____
KEYING OPTIONS N, A, B, C, D, E _____
MATERIAL _____
FINISH _____
TAPPED HOLE OPTION OMIT FOR STANDARD _____

Tel: +44 (0)845 017 1545

DRAWING NOT TO SCALE
DIMENSIONS IN MM